



(51) International Patent Classification⁷: H01S 5/068

(21) International Application Number: PCT/IL2005/000010

(22) International Filing Date: 4 January 2005 (04.01.2005)

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
60/536,523 15 January 2004 (15.01.2004) US

(71) **Applicant** (for all designated States except US): **ELOP ELECTROOPTICAL INDUSTRIES LTD.** [IL/IL]; P.O. Box 1165, 76110 Rehovot (IL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ZAK, Alexander [IL/IL]; 8/6 Kislev Street, 78721 Ashkelon (IL). **OLINSKY, Richard** [IL/IL]; 48 Kibbutz Givat Brenner, 60948 Kibbutz Givat Brenner (IL). **COHEN, Dov** [IL/IL]; 20 HaZarzir Street, 75545 Rishon-LeZion (IL).

(74) Agent: G.E. EHRLICH (1995) LTD.; 11 Menachem Begin Street, 52 521 Ramat Gan (IL).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GO, GW, ML, MR, NE, SN, TD, TG).


Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

(88) Date of publication of the international search report:
20 October 2005

[Continued on next page]

(54) Title: IMPROVEMENTS IN OR RELATING TO CONSTANT CURRENT TYPE POWER SUPPLIES

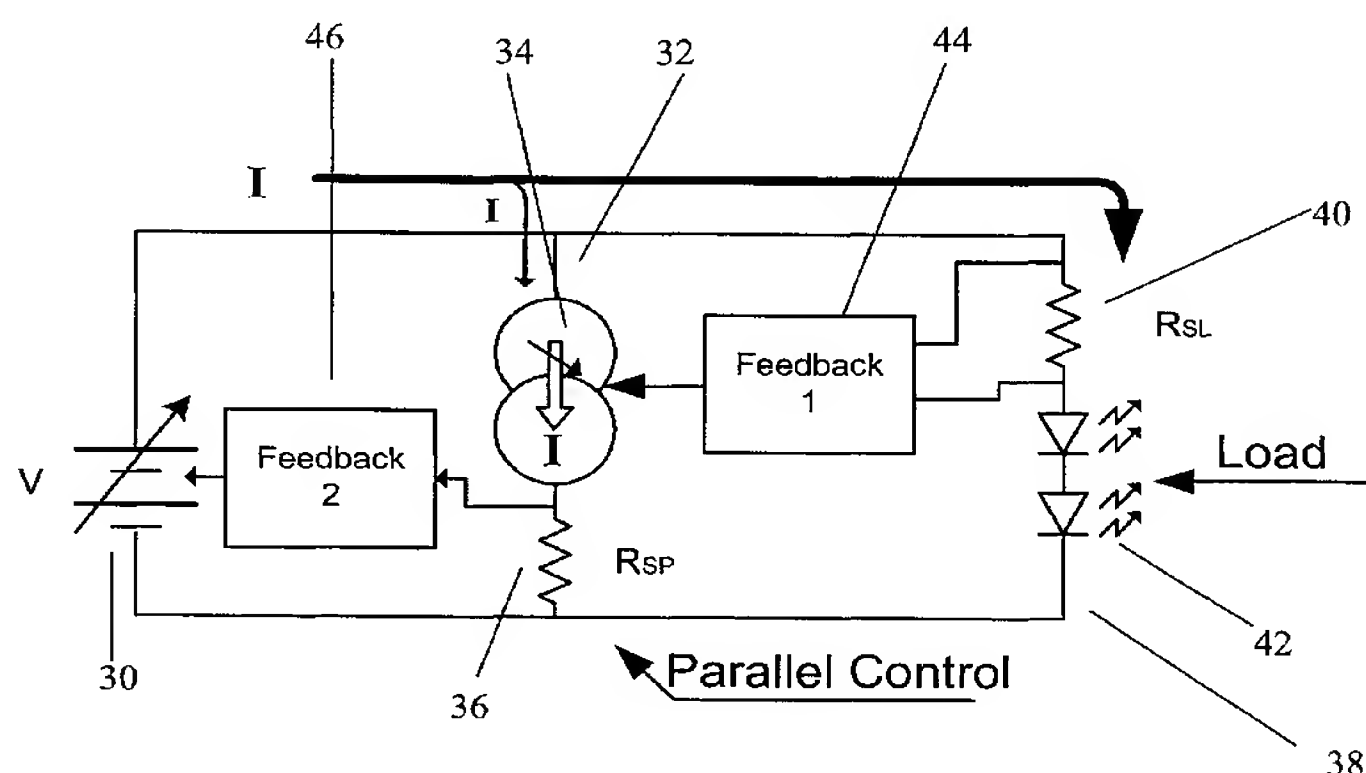

(57) Abstract: Constant current power supply arrangements can charge a capacitor with a constant current and are suitable as power supplies for laser diodes. A power supply for a laser diode comprises: a variable voltage power supply, a load path for carrying a laser diode, a shunt path connected in parallel with the load path, a current draining element for switching the shunt path, the current draining element being associated via a first feedback element with the variable voltage power supply such that current drained by the current draining element provides first feedback control of a voltage level of the variable voltage power supply, and a voltage operated second feedback element associated with both the load path and the shunt path to provide second feedback control of the current draining element to drain current via the current draining element in response to current changes at the load. A circuit arrangement for charging a capacitance comprises a load capacitance to be charged, a serially connected inductive component contributing to a serial frequency dependent impedance, and a variable frequency source for supplying charging current at a variable frequency, the variable frequency source being controllable to reduce frequency during charging of the capacitor, thereby to reduce the frequency dependent impedance and maintain a constant level of charging current to the load capacitance.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.